


429.00 EUR
incl. 19% VAT, plus [shipping](#)

- JBC400P93W-2930

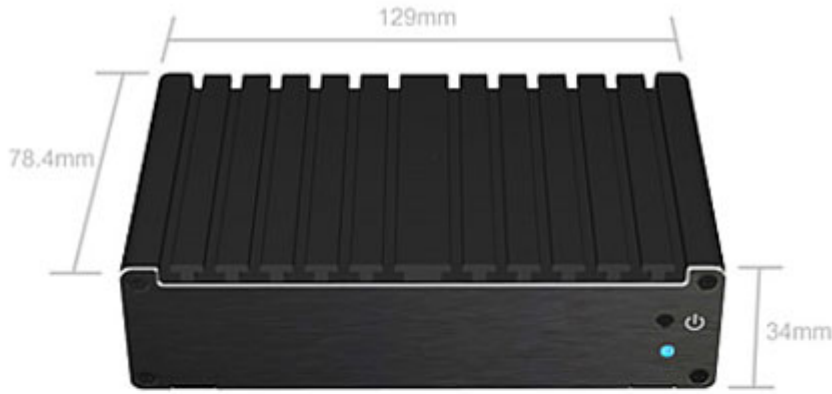

- INTEL® Bay Trail-M N2930, N2807 SoC Processor
- Embedded Long-life Series, Planned Lifecycle through Q1'2019
- Pico-ITX Form Factor Fanless Systems
- 12V DC jack on back panel for external power supply
- HDMI output, Full-size mSATA support
- ECO-design for EuP/ErP

Model No	JBC400P93-2930 JBC400P93-2807	JBC400P93W-2930 JBC400P93W-2807
Part No	HBJC400P93-2930 HBJC400P93-2807	HBJC400P93W-2930 HBJC400P93W-2807

Motherboard Specification

CPU	Fanless INTEL® Bay Trail-M Celeron N2930 SoC Processor 1.83GHz, Quad-Core, 7.5W Fanless INTEL® Bay Trail-M Celeron N2807 SoC Processor 1.58GHz, Dual-Core, 4.3W
Memory	Onboard 2GB DDR3L-1333, non-expandable
VGA	Intel® HD Graphics
LAN	1 x Realtek 8111G PCI-E Gigabit Ethernet
Audio	Intel® HDMI Audio

Storage	1 x full size mSATA Slot
Wireless / Mini-PCIE Slot	1 x half size Mini-PCI Express Slot Wireless 802.11 b/g/n + Bluetooth 4.0
Board Form Factor	Pico ITX Form Factor (100mm X 72mm)
Chassis Specification	
Product size	129 * 78.4 * 34 mm
Material	Lightweight aluminum alloy with extruded aluminum IO panel
Color	Black and Silver
HDD	NA
Front I/O Port	1 * Power Button 1 * Power LED
Rear I/O Port	1 * USB 3.0 port 1 * USB 2.0 port 1 * HDMI 1 * RJ-45 port 1 * 12V DC-in jack 2 * SMA Connector for WiFi Antenna 1 * Kensington Lock Hole
Power	Adapter : AC_90~240V / DC_12V_3A/36W
Environment	Operating Temperature : 0°C ~ 40°C with air flow Storage Temperature : -20°C ~ 80°C
Standard Accessory	√ 36W AC Adapter x1 √ Power Cord x1 √ Screw pack x1 √ DVD Disk x1 √ Manual x1 √ Wall / VESA / Din Rail Mount Bracket √ Din Rail Clip √ WIFI antenna (with HBJC400P93W-2930 model)
Functional	Digital Signage, Set Top Box, Thin Client, Car Entertainment, Smart Mini PC, POS/POI, KIOSK, HTPC
Certificate	CE,FCC,ErP For Barebone CE,FCC,TUV,UL,CCC,CB,ErP For Power Adapter