


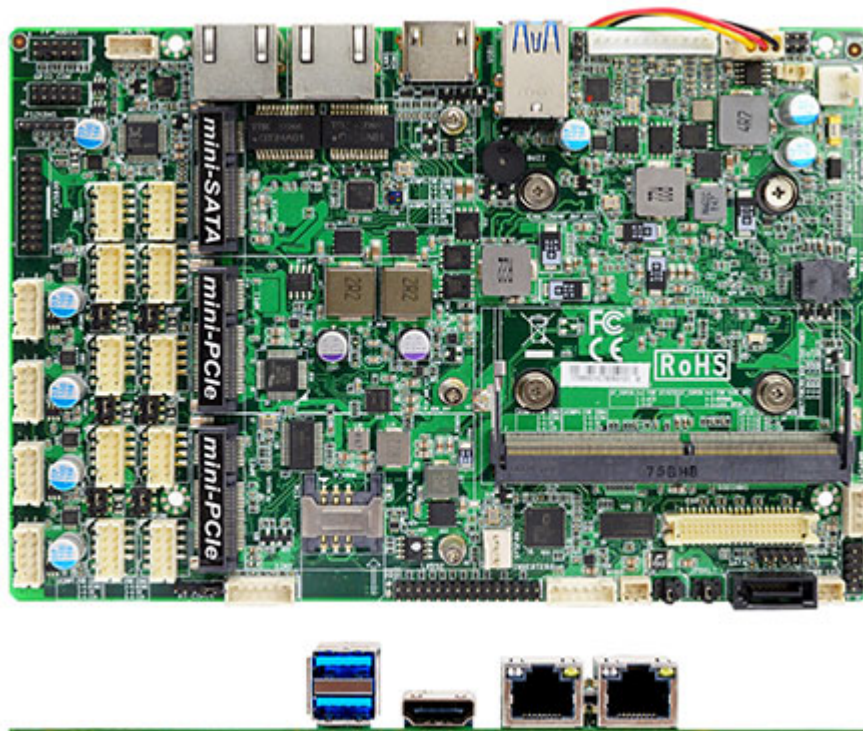

598.00 EUR

incl. 19% VAT, plus [shipping](#)

- Intel® Skylake-U I5-6200U SOC (CO-LAY I3/I5/I7 Series)
- Onboard Intel® 6200U 2.3GHz Dual Cores CPU
- Support 1 * DDR4/2133 SO-DIMM Max 16GB
- 2 * GbE, 4 * USB3.0, 8 * USB2.0, 10 * COM (COM1/2/3/4/5/6 Support 5V/12V), 2 * SIM Card
- Support CRT+HDMI+ EDP Display(Co-lay LVDS)
- Support Power Onboard(12~24V)
- Form Factor: 120mm x177mm

Model		
Model	– JNC7B-E6200	
Part Number	– JNC7B-E6200	
Form Factor		
Dimensions	– 120 x 177mm	
Processor System		
CPU	– Intel® Skylake-U I5-6200U	
Core Number	– 2	
Max Speed	– Turbo Boost 2.80GHz	
L3 Cache	– 3MB	
Chipset	– SoC	
BIOS	– AMI 128M Flash ROM	
Expansion Slot		
Mini-PCIe	– 2 (full size)	
mSATA	– 1	
SIM Card Holder	– 2	
Memory		
Technology	– DDR4 2133MHz DRAM	
Max.	– 16GB	
Socket	– 1 *SO-DIMM	

Graphics		
Controller	– Intel® HD Graphics 520	
VRAM	– Shared Memory	
VGA	– 1	
LVDS	– 1(CO-Lay eDP)	
eDP 1.3	– 1 (CO-Lay LVDS, Max Resolution: 4096×2304@60Hz)	
HDMI 1.4	– 1 (Max Resolution : 4096×2304@24Hz)	
MultiDisplay	– 3 Displays	
Ethernet		
Ethernet	– 10/100/1000 Mbps	
Controller	– 2 * Intel I219LM + i211AT Gigabit LAN	
Connector	– 2 * RJ 45	
Audio		
CODEC	– HD Audio : Realtek ALC662	
Channel	– FP_AUDIO, 3W Amplifier Speaker out	
SATA		
Max Data Transfer Rate	– 1 * SATAIII (6.0Gb/s)	
Rear I/O		
HDMI	– 1	
Ethernet	– 2	
USB	– 2 * USB 3.0	
Internal Connector		
USB	– 2 * USB3.0 & 8 * USB 2.0	
PS/2	– 1	
LVDS / inverter	– 1	
eDP	– 1	
VGA	– 1	
Serial	– 10 (COM1/2/3/4/5/6 Support 5V/12V TTL)	
SATA	– 1 * SATAIII (6.0Gb/s)	
mPCIe	– 2 (full size)	
mSATA	– 1	
SIM Card	– 2	
GPIO	– 8bit (5V)	
Chassis intrusion	– 1	
Audio Header	– 1	
SMBUS/ I2C	– 1	
AT mode	– 1	
Watchdog Timer		
Output	– From Super I/O to drag RESETCON#	
Interval	– 256 segments (0 ~ 255sec)	
Power Requirements		
Input PWR	– 12~24V DC-in (2-pin PWR Con)	

Power On	AT/ATX Supported – AT : Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready	
Certifications		
Certifications	– CE, FCC, RoHS, REACH	
Environment		
Temperature	– Operating: 0°C ~ 60°C	
	– Storage: -20°C ~ 85°C	
Warranty		
Warranty	– 2 Years Limited Warranty	