




79.95 EUR  
incl. 19% VAT, plus [shipping](#)

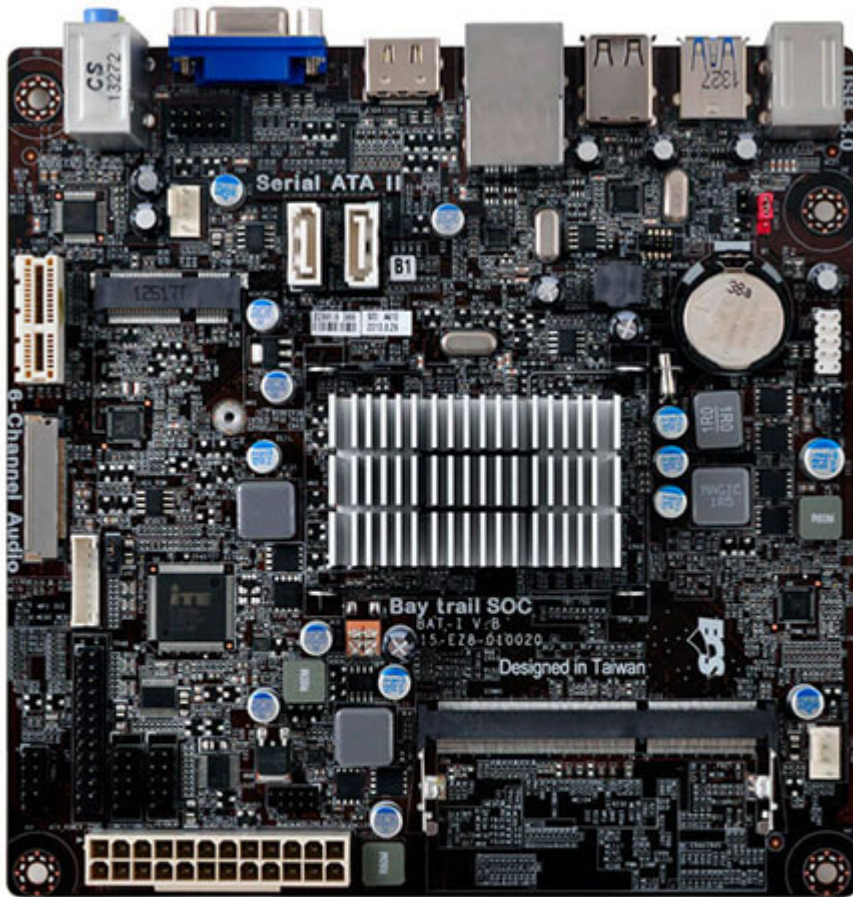

- Applied Solid Capacitor for CPU VRM to ensure a longer lifespan for system
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- Dual Display design for multiple output support
- Integrated Printer (LPT) port / header to expand functionality
- Microsoft Windows 8 Certified
- Intel ® VRD 12 Ready
- Supports DirectX® 11 to enhance graphical performance
- Supports HDMI 1.4a Technology ( resolution up to 1920X1200 ) and HDCP function
- Free Bundle: CyberLink Media Suite

Supports Intel® CNVi

Onboard Intel® Bay Trail  
processors  
On-Board CPU Intel ® Bay  
Trail J1900 processor  
VRD 12.0  
Solid Capacitor for CPU  
side  
Supports Intel®  
Hyper-Threading  
Technology

## CPU

---

|                       |                                                                              |
|-----------------------|------------------------------------------------------------------------------|
| <b>GRAPHICS</b>       | Supports DirectX® 11                                                         |
|                       | Supports Full HD 1080P                                                       |
|                       | Blu-ray / HD-DVD                                                             |
|                       | Playback                                                                     |
| <b>MEMORY</b>         | Single-channel DDR3                                                          |
|                       | Memory architecture                                                          |
|                       | 1 X DDR3 SO-DIMM                                                             |
|                       | socket                                                                       |
| <b>EXPANSION SLOT</b> | Support up to 8 GB                                                           |
|                       | 1 X PCI Express X 1 Gen 2.0slot(s)                                           |
|                       | 1 X Mini PCI Express X1 slot(s) for Wi-Fi /Bluetooth modules                 |
|                       | 2 X Serial ATAIII 3Gb/s                                                      |
| <b>Storage</b>        | 6-Channel HD audio                                                           |
|                       | CODEC Realtek ALC662                                                         |
|                       | Realtek ALC662 6-channel                                                     |
|                       | High Definition audio                                                        |
| <b>Audio</b>          | CODEC                                                                        |
|                       | Meets performance                                                            |
|                       | requirements for Microsoft                                                   |
|                       | WLP 3.08 Vista premium                                                       |
| <b>LAN</b>            | and mobile PCs                                                               |
|                       | Six channel DAC supports                                                     |
|                       | 16/20/24-bit PCM format                                                      |
|                       | for 5.1 channel audio                                                        |
| <b>USB</b>            | solution                                                                     |
|                       | Emulation of 26 sound                                                        |
|                       | environments to enhance                                                      |
|                       | gaming experience                                                            |
| <b>REAR PANEL I/O</b> | Voice Cancellation and                                                       |
|                       | Key Shifting in Karaoke                                                      |
|                       | mode                                                                         |
|                       | Compatible with Direct                                                       |
| <b>REAR PANEL I/O</b> | Sound 3D™, A3D™,                                                             |
|                       | I3DL2                                                                        |
|                       | Realtek RTL8111G                                                             |
|                       | Gigabit Fast Ethernet                                                        |
| <b>REAR PANEL I/O</b> | Controller                                                                   |
|                       | 1 X USB3.1 Gen1 port(s) up to 5Gb/s                                          |
|                       | 6 X USB2.0 port(s) Up to 480 Mb/s ( Back Panel 4 port(s), Onboard 2 port(s)) |
|                       | 1 X PS/2 Keyboard & PS/2                                                     |
| <b>REAR PANEL I/O</b> | mouse connectors                                                             |
|                       | 1 X Audio port (Line                                                         |
|                       | Out/Line In/Mic In)                                                          |
|                       | 1 X RJ-45 port                                                               |
| <b>REAR PANEL I/O</b> | 1 X HDMI port(s)                                                             |
|                       | 1 X D-Sub (VGA) port(s)                                                      |
|                       | 1 X USB3.1 Gen1 port(s)                                                      |
|                       | 4 X USB2.0 port(s)                                                           |

---

|                                     |                                                           |
|-------------------------------------|-----------------------------------------------------------|
|                                     | 1 X 4-pin CPU_FAN<br>connector with smart fan             |
|                                     | 1 X 4-pin SYS_FAN<br>connector with smart fan             |
|                                     | 1 X Front Panel<br>MIC/Speaker out header                 |
|                                     | 1 X Front Panel<br>switch/LED header                      |
| <b>CONNECTORS &amp;<br/>HEADERS</b> | 1 X USB 2.0 header<br>(Support additional 2 USB<br>ports) |
|                                     | 2 X SATA II 3Gb/s<br>connector(s)                         |
|                                     | 1 X CLR_CMOS header                                       |
|                                     | 2 X Serial port header<br>(COM)                           |
|                                     | 1 X Parallel port header<br>(LPT)                         |
|                                     | 1 X LVDS connector<br>(optional)                          |
|                                     | AMI BIOS with 8 MB SPI<br>Flash ROM                       |
|                                     | Supports ACPI 5.0 & DMI                                   |
| <b>SYSTEM BIOS</b>                  | Dual Display                                              |
|                                     | Plug and Play, STR (S3) /<br>STD (S4) , Hardware          |
|                                     | monitor, Multi Boot                                       |
|                                     | Multi-Language BIOS                                       |
|                                     | Audio, LAN, can be<br>disabled in BIOS                    |
|                                     | Dual-Monitor function                                     |
| <b>FORM FACTOR</b>                  | Mini ITX Form Factor                                      |
|                                     | 170*170                                                   |
| <b>OS Support</b>                   | Windows 7 64-bit                                          |
|                                     | Windows 8.1 32-bit                                        |
|                                     | Windows 8.1 64-bit                                        |
|                                     | Windows 10 64-bit                                         |
|                                     | Windows 10 32-bit                                         |
| <b>Certifications</b>               | CE/FCC Certification                                      |
|                                     | ErP/EuP Certification                                     |
|                                     | WHQL Certification                                        |
|                                     | WHCK Certification                                        |