


249.00 EUR

incl. 19% VAT, plus [shipping](#)

- Intel Elkhart Lake Celeron N !
- 1x HDMI !
- 2x LAN !
- Pico-ITX (100 x 72mm) !

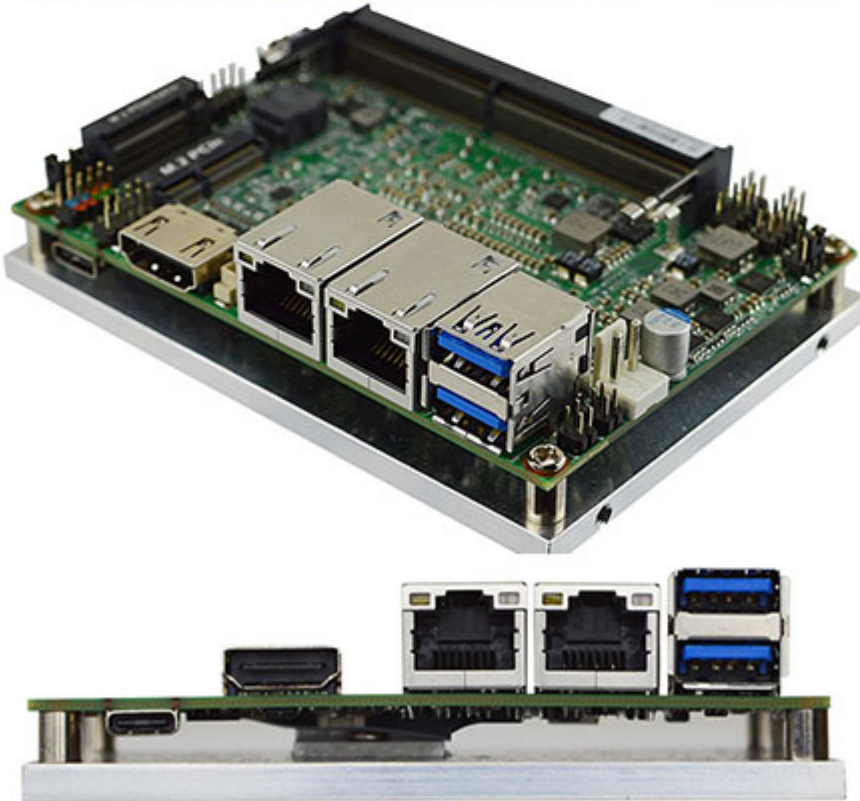

- Intel® Elkhart Lake Celeron® N Series SoC Processor
- Long-Life Embedded Class with Planned Lifecycle Through Q1'2036
- 1 * DDR4-3200MHz Single Channel SO-DIMM up to 32GB
- 2 * Realtek RTL8119I 1GbE
- 1 * M.2 M-key, 2242 (PCIe 3.0 x2 NVMe/SATA)
- 1 * M.2 E-key, 2230 (PCIe 3.0 x1/USB 2.0)
- 12V Power-In & ECO-design for EuP/ErP

Model	MP01-62100 MP01-62103 (32GB eMMC) MP01-62104 (64GB eMMC)
-------	--

Form Factor	Pico-ITX (100 x 72mm)
Processor System	Intel® Celeron N6210, 1.20GHz – 2.60GHz Burst, 2-Core 2-Thread, 6.5W TDP * Ships with flat silver aluminum heatsink for direct attach
Memory	1 x 260-pin Single Channel DDR4-3200 SO-DIMM up to 32GB Total
Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors
Ethernet	2 x Realtek RTL8119I 1GbE
Audio	Realtek ALC888S HD Audio
Storage	1 x M.2 (SATA & PCIe 3.0 x2, M-key, 2242 NVMe)E
Super IO	FINTEK F81804U
TPM	Intel fTPM 2.0 (PTT)
Back Panel Connectors	1 USB 3.2 Gen 2 Type-C (10 Gb/s) 1 HDMI 2.0b (4096 * 2160 @ 60Hz) 2 RJ45 LAN (10/100/1000) 2 USB 3.2 Gen 2 (10 Gb/s)
Onboard I/O Connectors	1 M.2 M-Key, 2242 (SATA & PCIe 3.0 x2 NVMe) 1 M.2 E-key, 2230 (PCIe 3.0 x1/USB 2.0 for WiFi) 1 Serial Headers (1 * RS232/422/485) 1 USB Pin Headers for 2 additional USB 2.0 Ports 1 40-pin eDP (4096 * 2160 @ 60Hz) 1 8 bit GPIO Header 1 4-pin SMBUS Header 1 9-pin Front Audio Header 1 AT/ATX Mode Jumper 1 Chassis Intrusion Jumper 1 2-pin +12V Power-In (Mating plug: JST VHR-2N or TE 1-1123722-2)
Power Supply	Internal Power Supply – the board can be powered via the internal +12V 2-pin power connector, where pin 1 is +12V and pin 2 is GND. The internal 2-pin power connector accepts a JST VHR-2N or TE 1-1123722-2 connector from the power supply. A 12V DC-in 5.5/2.5mm barrel jack cable included.
Environment	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 85°C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	– Windows 10 64bit, Windows 10 IoT 64bit, Windows 11, Linux (CentOS 9, Debian 11.3, Fedora 36-1.5, FreeBSD 13.1, OPNsense 22.1.2, pfSense 2.6.0, Ubuntu 22.04)