



HBJC150I08-H410-B

Intel® 10th Gen. Core™ i7/ i5 /i3, Celeron & Pentium® LGA1200 Socket Processor, Max. 65W TDPs

1. Intel® 10th LGA1200 Socket Comet Lake-S Processor (Max. 65W TDP)
2. Support 2* DDR4 2666/2400MHz SO-DIMM up to 64 GB
3. 3* USB3.2, 3* USB2.0, 4* COM, 1* HDMI, 1* DP, 2* RJ45, 1* MIC, 1* Line out, 1* Line in
4. M/B Form Factor : Mini ITX (170x170mm)
5. 1U 250W FLEX Power




External I/O


Front



Rear

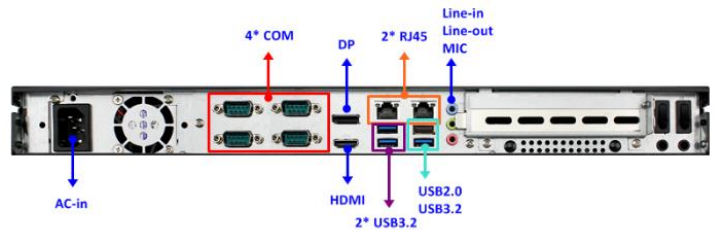

Mechanical Drawings (Unit = mm)

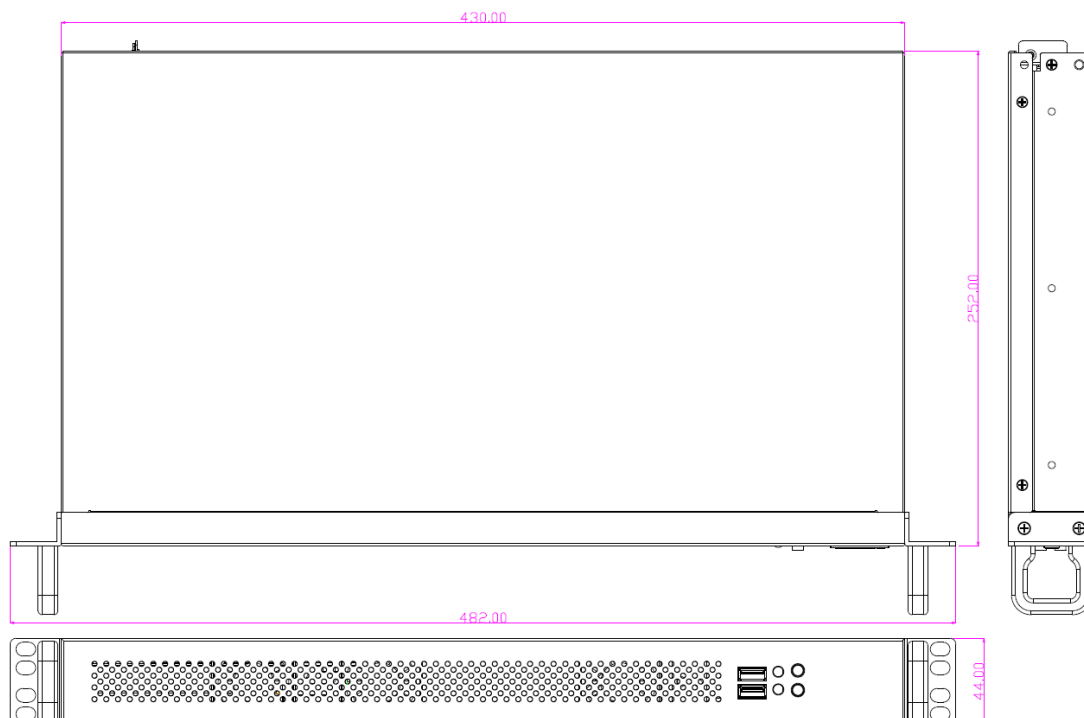


Specifications

M/B Model	<ul style="list-style-type: none"> MI08-00 / Mini ITX (6.7-in * 6.7-in, 170 * 170mm) (Default) MI08-02 (W/TPM2.0)
BIOS	AMI 128Mb Flash ROM
Memory	2* Dual CH non-ECC DDR4 2666/2400MHz SDRAM SO-DIMM up to 64GB
Storage	<ul style="list-style-type: none"> 2 * 2.5" or 1 * 3.5" SATA3 6Gb/s internal drive bay 1 * M.2_SSD (M key-2242/2280) support NVMe
Rear Panel I/O	<ul style="list-style-type: none"> 3 * USB 3.2 (Gen. 1) 1 * USB 2.0 1 * HDMI 1.4 (Max Resolution: 4096x2160@30Hz) 1 * DP (Max Resolution: 4096x2304@60Hz) 2 * RJ45 1 * Mic, 1 * Line in, 1 * Line-out 4 * COM (COM 1 support RS232/422/485)
Compliance	CE, FCC, LVDS, RoHS
Temperature	<ul style="list-style-type: none"> Operating Temperature: 0 ~ 50° C Storage Temperature: -10 ~ 70° C Humidity: 10% ~ 90% RH @40°C (non-condensing)
Dimensions	330 (W) x 192 (D) x 44 (H) mm
Packing	<ul style="list-style-type: none"> Net Weight: 3.5KG Gross Weight: 4.5KG Color Box dimension: 560 (W) * 400 (D) * 140 (H) mm
OS Support	Windows 10, Linux
Warranty	2 Years limited warranty

Part No	<ul style="list-style-type: none"> HBJC150I08-H410-B (non-WIFI) HBJC150I08I-H410-B (WIFI)
CPU/Chipset	<ul style="list-style-type: none"> Intel® 10th LGA 1200 Socket Core i7/i5/i3/Pentium/Celeron Comet Lake-S Processor (Max. 65W TDP) H410 chipset
Network	<ul style="list-style-type: none"> 1 * Intel i219V GbE 1 * Intel i211AT GbE
Expansion	<ul style="list-style-type: none"> 1 * M.2 E-key 2230 (PCIex1/USB2.0) 1 * PCIex16 slot Support onboard TPM2.0 (MI08-02) / optional
Front Panel I/O	<ul style="list-style-type: none"> 1 * Power button, 1 * Reset button 1 * Power LED, 1 * HDD LED 2 * USB 2.0
Power Source	<ul style="list-style-type: none"> 1U 250W FLEX ATX POWER AC 90~240V input

* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

Part Number Rules

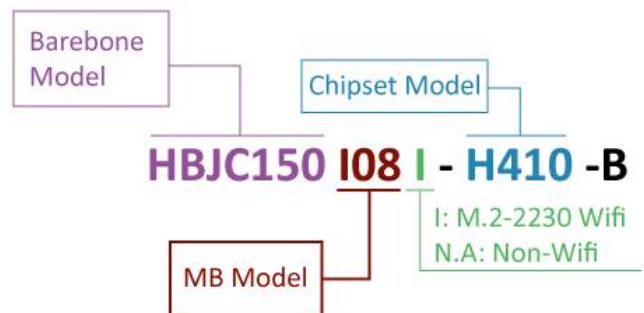

Accessories

Parts Number	Description
-----	HBJC150I08 Series
Change according to shipping area	Power cord

Optional Accessories

Parts Number	Description
G01-SATA3-BL-1F	SATA3 CABLE L=50cm
LCSCJC150-F	JC150 1U CASE Screw Pack